



## ▶ Zerust® ICT®510-C VCI Film

Zerust®/Excor® ICT510-C VCI Film provides cost-effective and versatile protection against corrosion damage for metals in shipping and storage. It is available in ferrous, non-ferrous and multimetal protection types and in various sized rolls, sheets, tubing and bags.

Zerust VCI packaging film diffuses proprietary Zerust VCIs (Vapor Corrosion Inhibitors) to protect metals from rust and corrosion. Use Zerust ICT510-C VCI Film to protect metal components and assemblies, machined and cast parts, and more for years. For additional protection and use in challenging environments, packaging can be used with Zerust corrosion inhibitor liquid RPs and VCI diffuser products. Check with your Zerust/Excor representative for a comprehensive corrosion management solution most effective for your metal assets.

Zerust is the inventor of poly VCI technology and Zerust VCI film has proven its performance and safety\* with thousands of customers worldwide for over 35 years. It is used to protect valuable metal items for manufacturers in industries such as automotive, agricultural, aerospace and mining. Zerust/Excor offers onsite support and service using our local partners in more than 60 countries.

### Application Example

Zerust VCI Film sheeting is layered in a dunnage system to protect engines from corrosion in shipping.



### ▶ Benefits

Effective corrosion protection and packaging combined in one step

Metals are ready for use and assembly directly out of the packaging

Available in many different formulations and sizes

Provides safe\* and effective Zerust VCI protection.


Recyclable

### Application Type

Storage  
Shipping  
Work in progress

\*Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom and CA WHIMS regulations.

## Product Information

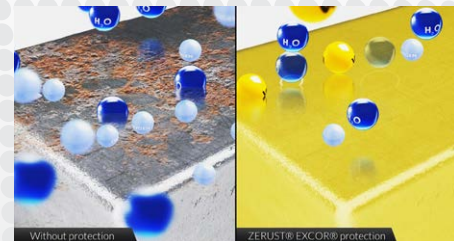

<b>Description</b>	Zerust®/Excor® ICT®510-C VCI Film is a polyethylene product impregnated with volatile corrosion inhibitors.
<b>Appearance</b>	Typical colors are clear, yellow or green. Additional colors available upon request. Subject to order minimums.
<b>Metal Protection Types</b>	Available in ferrous, multimetal and non-ferrous protection formulations.
<b>Protection Life</b>	Protects clean metals for years when used correctly and utilized within three years from receipt.
<b>Storage</b>	Store in original packaging away from direct sunlight in conditions below 85°F (30°C) and 50% RH until ready for use.

Property	Direction (Machine or Transverse)	Zerust ICT510-C Film*	ASTM Test Method
Film Thickness	-	4mil (102 µm)	D-6988
Dart Impact Resistance	-	300 g	D-1709
Tear Strength	MD	0.60 lb-f (2.7 N)	D-1938
	TD	0.65 lb-f (2.9 N)	
Tensile Strength at Yield	MD	1905 psi (13.1 MPa)	D-882
	TD	1538 psi (10.6 MPa)	
Tensile Strength at Break	MD	3045 psi (21.0 MPa)	D-882
	TD	2917 psi (20.1 MPa)	
Elongation at Break	MD	560%	D-882
	TD	610%	
Breaking Factor	MD	11.0 lb-f/in (1926 N/m)	D-882
	TD	11.5 lb-f/in (2014 N/m)	
Water Vapor Transmission Rate @78°F (26°C), 90% RH	-	0.06 g/(100 in²/day)	F-1249
Vapor Inhibiting Ability (VIA)	-	Pass	NACE TM0208-2013

\* Typical values, not meant to be a specification.

Warranty and Disclaimer Information: We guarantee our products conform to documented quality specifications. Product information subject to change without notice. We make no warranty of any kind expressed or implied as to the effects of use (including, but not limited to, damage or injury). For full warranty and disclaimer information visit, [www.zerust.com/warranty](http://www.zerust.com/warranty).

©2015 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor-Tab®, EXCOR®, Flange Saver®, ICT®, NTI®, Plastabs®, Z-CIS®, Zerion®, ZERUST®, The ZERUST People®, and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

## Availability

Zerust/Excor® ICT510-C VCI Film is available in many stock and custom options. Contact a Zerust account manager for pricing and availability.

### Size Range (width):

Bags & Tubing:  
2" - 125" (flat)  
2" - 150" (gusset)  
Sheeting: 2" - 26'

## Recyclable

Dispose of in accordance with local, national and international regulations. Check on options for recycling and incineration.

## Safety

- Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom and CA WHIMS regulations.
- Zerust VCI chemistry is safe for sensitive electronics. No galvanic effects, residues or changes in the properties of metals. The protective molecules dissipate upon opening of package.



## for more information contact

Oil & Gas Preservation Services Ltd,

Grange Business Centre, Belasis Avenue, Billingham, TS23 1LG, United Kingdom.

Tel: +44 01642 805822 Web: <http://www.oilgaspreservationservices.co.uk>