



Zerust[®] ICT[®] 520-CSL Cold Seal

TECHNOLOGY THAT PROTECTS METALS FROM CORROSION

PRODUCT INFORMATION

Zerust[®] ICT[®]520-CSL Film is a cold-adhesive film made with proven Zerust vapor corrosion inhibitors (VCIs). It provides superior corrosion protection in an easy-to-use cold-seal film. Use it to protect bare metal parts, such as gears, differential units and axle ends. Zerust Cold Seal Film protects multiple metal types, through both contact and vapor corrosion inhibitors, for up to 2 years.

Zerust Cold Seal Film saves valuable time, equipment and labor in packaging operations by eliminating the need to heat-seal, apply tape or staples. Zerust ICT520-CSL Film bonds to itself, creating a self-adhesive closure in seconds. In addition, the film bonds only to itself and will not adhere to or leave a residue on the product that is being protected.

FEATURES

- Proven corrosion protection
- Easy-to-use
- Adheres to itself
- Non-toxic
- Multimetal protection

BENEFITS

- Reduce corrosion incidents
- Save time, money & resources
- Protected items are visible
- Comes with Zerust[®] global on-site support

Significantly reduce your labor and equipment costs by switching to Zerust[®] ICT[®]520-CSL Film. Zerust[®] ICT[®]520-CSL Film forms a strong seal in seconds without heat-sealing, tape or staples.

APPLICATION EXAMPLES

ZERUST[®] ICT[®]520-CSL FILM PROTECTING A LARGE GEAR FOR SERVICE SHIPMENT. THIS UNIT IS TYPICALLY WRAPPED WITH VCI PAPER AND SEALED WITH TAPE.



ZERUST[®] ICT[®]520-CSL FILM PROTECTING A DIFFERENTIAL UNIT FOR SERVICE SHIPMENT. THIS UNIT IS TYPICALLY WRAPPED WITH VCI PAPER AND SEALED WITH TAPE.



APPLICATION TYPE

CORROSION PROTECTION FOR:



ORDERING INFORMATION

■ AVAILABILITY

6" - 36" Sheeting
Perforated or non-perforated

■ THICKNESS

2 - 8 mil

■ COLOR

Clear is the standard color of ICT®520-CSL Film. Custom colors available upon request.

■ PROTECTION TYPE

Multimetal corrosion protection capability.

■ PROTECTION LIFE

Will protect metals for up to 2 years if properly packed and stored.

■ SHELF LIFE


Shelf life of 2 years if stored at 85° F or less, out of direct sunlight and in original packaging.

■ IMPORTANT INFORMATION

Contamination can negatively affect the film's ability to form a strong seal.

Do not re-use ICT®520-CSL Film; once the seal is pulled apart, it will not reform a complete seal.

ICT® 500 Series Overview: Packaging Film Products

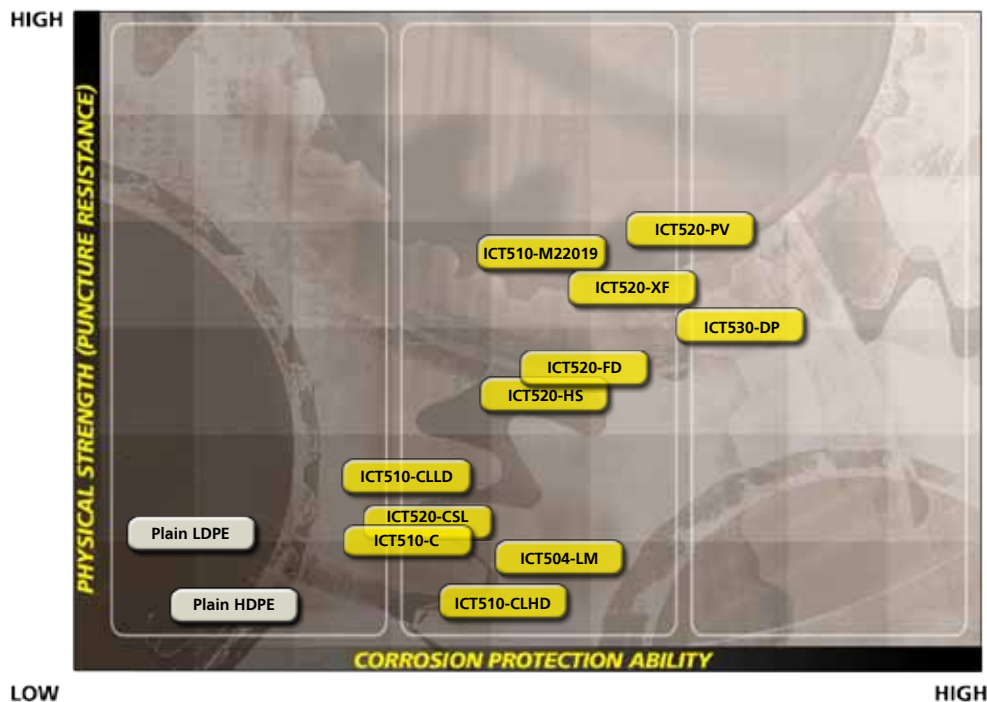

We offer a full range of products for all types of situations.

Choose by corrosion protection abilities.

Choose by physical protection abilities.

Find the product that best fits your needs.



for more information contact

Oil & Gas Preservation Services Ltd,

Grange Business Centre, Belasis Avenue, Billingham, TS23 1LG, United Kingdom.

Tel: +44 01642 805822 Web: <http://www.oilgaspreservationservices.co.uk>